



HIGH BAY PRODUCT COMPARISON GUIDE


*Linear & Round High Bay Fixtures for
EVERY Application*

- Energy efficient, easy contractor-friendly lighting solutions
- Lightweight designs allow for minimal installation effort
- Form factor and lumen packages for every opportunity

IHB2




AHB




RHB



AUL



MHB




IHB4



ALI2



ALI4




ALI
100L



MHB
60L



IHB4
48L



AUL
30L





RHB
30L



AHB
30L



IHB2
24L

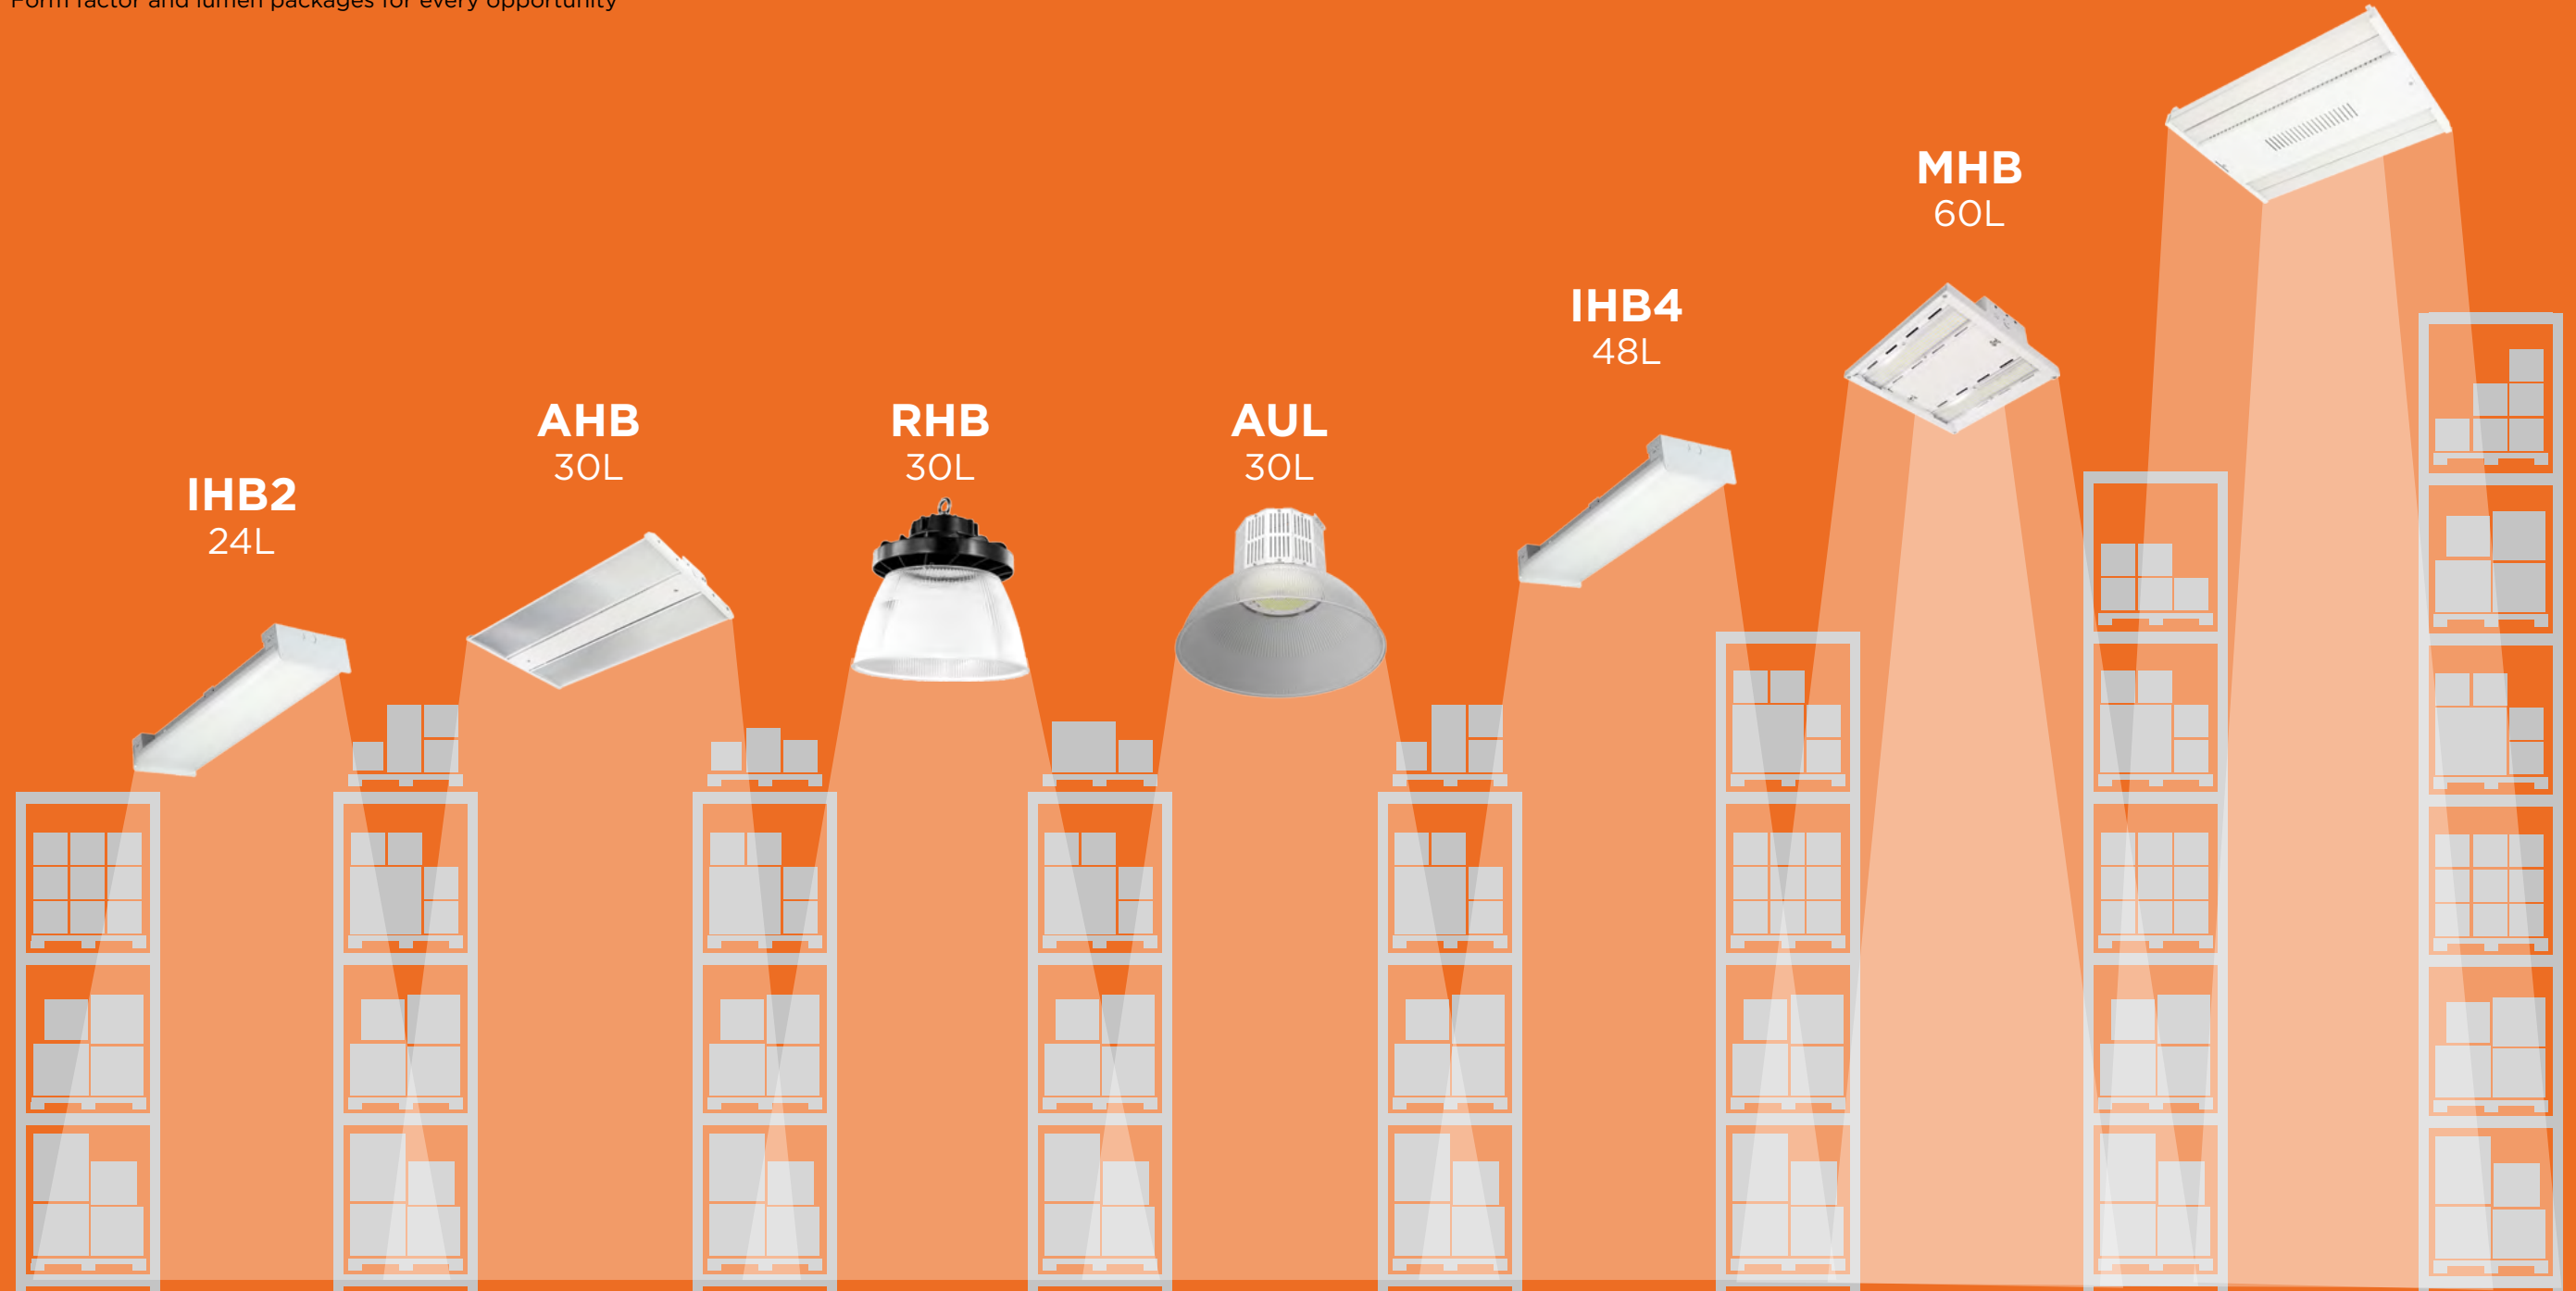

	LINEAR					ROUND	
							
	IHB2 Series	AHB Series	MHB Series	IHB4 Series	Alliance	RHB Series	Aureus
	★ ★ ★	★ ★ ★	★ ★ ★ ★	★ ★ ★ ★	★ ★ ★ ★ ★	★ ★ ★	★ ★ ★ ★ ★
Applications	Warehouse, Manufacturing, Service Bays, Retail	Warehouse, Manufacturing, Service Bays, Retail, Gymnasium	Warehouse, Manufacturing, Service Bays, Retail, Gymnasium	Warehouse, Manufacturing, Service Bays, Retail	Warehouse, Manufacturing, Service Bays, Retail, Gymnasium	Light Duty, Warehouse, Manufacturing, Retail, Gymnasiums	Light Duty, Warehouse, Manufacturing, Retail, Gymnasiums,
Colors Available	White	White	White	White	White	White, Black	White, Black, Silver, Custom
Sizes Available	2'	2'	1', 2' length	4'	2', 4'	13.5" Diameter	15" Diameter
Mounting Height	Up to 24'	Up to 30'	Up to 60'	Up to 40'	Up to 90'	Up to 40'	Up to 40'
Delivered Lumens	9,000 to 15,000	18,000 - 30,000	12,000L - 60,000L	9,000 to 48,000	12,000 to 100,000	18,000 to 30,000	6,000 to 30,000
CCT	4000K, 5000K	4000K, 5000K	4000K, 5000K	4000K, 5000K	4000K, 5000K	4000K, 5000K	3000K, 3500K, 4000K, 5000K
LPW	Up to 154 LPW	Up to 138 LPW	Up to 165 LPW	Up to 154 LPW	Up to 172 LPW	Up to 133 LPW	Up to 162 LPW
Temperature Rating	Up to 55C	Up to 50C	Up to 50C	Up to 55C	Up to 60C	50C	50C
Listings	Damp Location	Damp Location	Damp Location	Damp Location	Damp Location	Wet Location, IP65	Damp Location
DLC ¹	Premium	Premium	Standard	Premium	Premium	Premium	Premium
Optics Options	No Lens, Acrylic (Diffuse)	Acrylic (Frosted)	Polycarbonate (Clear, Diffuse)	No Lens, Acrylic (Diffuse)	No Lens, Acrylic (Clear, Diffuse)	Open w/Reflector (16" or 22")	Open w/Reflector (16" or 22")
Distributions	Wide (120)	Wide (120)	Wide (120), Narrow (30)	Wide (120)	Wide (120), Narrow (30)	General	General
Voltage Range	120V - 480V	120V - 277V	120V - 480V	120V - 480V	120V - 480V	120V - 480V	120V - 480V
Battery Backup	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Controls/Sensors	External PIR Motion Sensor External PIR Motion Sensor Bluetooth	External PIR Motion Sensor Integral/External PIR Motion Sensor Bluetooth	External PIR Motion Sensor Integral/External PIR Motion Sensor Bluetooth	External PIR Motion Sensor External PIR Motion Sensor Bluetooth	AirLink Synapse Indoor External PIR Motion Sensor Integral/External PIR Motion Sensor Bluetooth	External PIR Motion Sensor	AirLink Synapse Indoor Integral PIR Motion Sensor Bluetooth
Pricing	\$	\$	\$\$	\$\$	\$\$\$	\$\$	\$\$\$