

LED WALL SCNCE (PWM)



DOE LIGHTING FACTS

Department of Energy has verified representative product test data and results in accordance with its Lighting Facts Program. Visit www.lightingfacts.com for specific catalog strings.

LIGHT OUTPUT - PWM			
Distribution/Lumens (Nominal)			
		Type S	Watts
Cool White	LW	1400	15
	HO	5200	56
Neutral White	LW	1300	15
	HO	4900	56

LED Chips are frequently updated therefore values may increase.

US & Int'l. patents pending

ENERGY SAVING CONTROL OPTIONS – DIM – 0-10 volt dimming enabled with controls by others.

EXPECTED LIFE - Minimum 60,000 hours to 100,000 hours depending upon the ambient temperature of the installation location. See LSI web site for specific guidance.

LEDS - Available with select high-brightness LEDs in Cool White (5000K) or Neutral White (4000K) color temperature, 70 CRI.

DISTRIBUTION/PERFORMANCE - Type S (Standard Symmetric). Exceptional uniformity creates bright environment at lower light levels.

HOUSING - One-piece die-cast aluminum housing is smoothly contoured rectangular shape. Mounting hardware is stainless steel or electro-zinc plated steel. Housing and optical unit are sealed with extruded silicone gasket; supply conductors with molded EPDM bushing.

OPTICAL UNIT - Clear tempered optical-grade flat glass lens sealed to the aluminum optic housing creates an IP65 rated unit. Pressure stabilizing breather allows super-tight protection while preventing cycling from building up internal pressures and vacuums that can stress optical unit seals.

WALL MOUNTING - Galvanized-steel universal wall mounting plate easily mounts directly to 4" octagonal or square junction box. EPDM gasket is supplied to be installed between mounting plate and junction box, sealing junction box from entrance of water. Universal plate permits fixture to be mounted in uplighting (indoor only) or downlighting position.

POLE MOUNTING - XPMA (for square) or XPMAR (for round) allows mounting to poles in single and D180 configurations. Use with 3" reduced drilling pattern.

ELECTRICAL - Two-stage surge protection (including separate surge protection built into electronic driver) meets IEEE C62.41.2-2002, Location Category C. Available with universal voltage power supply 120-277VAC (50/60Hz input) or 347-480VAC.

DRIVER - Available in Low Wattage (LW) and High Output (HO) drive currents (Drive currents are factory programmed). Components are fully encased in potting material for moisture resistance. Driver complies with FCC standards. Driver can be easily accessed and removed. Optional 0-10V dimming available with controls by others.

OPERATING TEMPERATURE - -40°C to +50°C (-40°F to +122°F)

FINISH - Fixtures are finished with LSI's DuraGrip® polyester powder coat finishing process. The DuraGrip finish withstands extreme weather changes without cracking or peeling.

WARRANTY - LSI LED fixtures carry a limited 5-year warranty.

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.

SHIPPING WEIGHT (in carton) - 27 lbs./12.2Kg

LISTING - UL listed to ANSI/UL1598, UL8750 and other U.S. and international safety standards. Suitable for wet locations in downlight position. For a list of the specific products in this series that are DLC listed, please consult the LED Lighting section of our website or the Design Lights website at www.designlights.org.

This product, or selected versions of this product, meet the standards listed below. Please consult factory for your specific requirements.



LED WALL SCONCE (PWM)

LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **PWM S LED HO CW UE WHT PCI 120**

Prefix	Distribution	Light Source	Drive Current	Color Temperature	Input Voltage	Finish	Optional Controls	Optional Sensor/Options
PWM - LED Wall Sconce	S - Standard Symmetrical	LED	LW - Low Watt HO - High Output	CW - Cool White (5000K) NW - Neutral White (4000K)	UE - Universal Voltage (120-277) 347-480 120 ¹	BLK - Black BRZ - Bronze GPT - Graphite MSV - Metallic Silver PLP - Platinum Plus SVG - Satin Verde Green WHT - White	Wireless Control System ^{2,3} (blank) - None PCM - Platinum Control System PCMH - Host/Satellite Platinum Control System GCM - Gold Control System GCMH - Host/Satellite Gold Control System DIM - 0-10 volt dimming (required for satellite fixtures) Stand-Alone Control (blank) - None DIM - 0-10 volt dimming (from external signal)	Sensor PCI120 - 120V Button-Type Photocell PCI208 - 208V Button-Type Photocell PCI240 - 240V Button-Type Photocell PCI277 - 277V Button-Type Photocell PCI347 - 347V Button-Type Photocell Options XPMA - Pole Mounting Adaptor w/ Fixture Back Plate for Use with Square Poles ⁴ XPMAR4 - Pole Mounting Adaptor w/ Fixture Back Plate for Use with 4" O.D. Round Poles ⁴ XPMAR5 - Pole Mounting Adaptor w/ Fixture Back Plate for Use with 5" O.D. Round Poles ⁴


ACCESSORY ORDERING INFORMATION² (Accessories are field installed)

Description	Order Number	Description	Order Number
PWM Polycarbonate Shield	244657	DFK208, 240 - Double Fusing	DFK208,240 ⁵
PWM SW BLK - Surface Wiring Box (Available in black only)	356915BLK	DFK480 - Double Fusing	DFK480 ⁵
FK120 - Single Fusing	FK120 ⁵	FK347 - Single Fusing	FK347 ⁵
FK277 - Single Fusing	FK277 ⁵		

FOOTNOTES:

- 1- On Low Watt (LW) drive current, 120V only is DLC qualified. Specify 120 in place of UE.
- 2- For wireless controls information and accessories, see Controls section.
- 3- Requires a SiteManager and override switch.
- 4- Designed with 3" reduced drilling pattern. For S or D180 mounting configuration only.
- 5- Fusing to be installed in a compatible junction box supplied by contractor.

DIMENSIONS

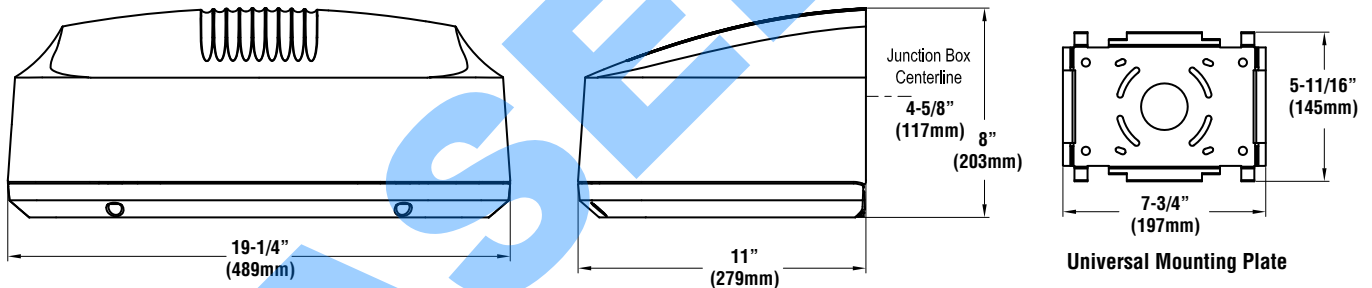

BUG LISTING

PWM - TYPE S

Drive Current	Color Temp.*	Lumens	Watts	LER	BUG Rating
HO	CW	5184	56	93	B2-U0-G1
	NW	4917	56	88	B2-U0-G1
SS	CW	1439	15	95	B1-U0-G0
	NW	1310	15	85	B1-U0-G0

* Color Temperature: NW-4000K, CW-5000K



Project Name _____ Fixture Type _____
Catalog # _____

07/28/16
© 2016
LSI INDUSTRIES INC.